

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 September 2003 (18.09.2003)


PCT

(10) International Publication Number  
**WO 03/077371 A2**

- (51) International Patent Classification<sup>7</sup>: **H01R 4/66**
- (21) International Application Number: **PCT/FI03/00183**
- (22) International Filing Date: **11 March 2003 (11.03.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
20020479 14 March 2002 (14.03.2002) **FI**  
20021651 16 September 2002 (16.09.2002) **FI**
- (71) Applicant (for all designated States except US): **METSO PAPER, INC. [FI/FI];** Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **PUTKISTO, Kaisa [FI/FI];** Poukamankatu 7 C 8, FIN-33720 Tampere (FI). **MAIJALA, Juha [FI/FI];** Messukyläinkatu 37 B 12, FIN-33700 Tampere (FI). **KÄSMÄ, Veli [FI/FI];** Lintuvidankatu 33 G 26, FIN-33340 Tampere (FI).
- (74) Agent: **TAMPEREEN PATENTTITOIMISTO OY;** Hermiankatu 12 B, FIN-33720 Tampere (FI).
- (81) Designated States (national): **AE, AG, AL, AM, AT** (utility model), **AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ** (utility model), **CZ, DE** (utility model), **DE, DK** (utility model), **DK, DM, DZ, EC, EE** (utility model), **EE, ES, FI** (utility model), **FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK** (utility model), **SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO** patent (**GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW**), **Eurasian** patent (**AM, AZ, BY, KG, KZ, MD, RU, TJ, TM**), **European** patent (**AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR**), **OAPI** patent (**BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG**).
- Published:  
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: **A GROUNDING ELECTRODE AND A METHOD IN WHICH IT IS UTILIZED**

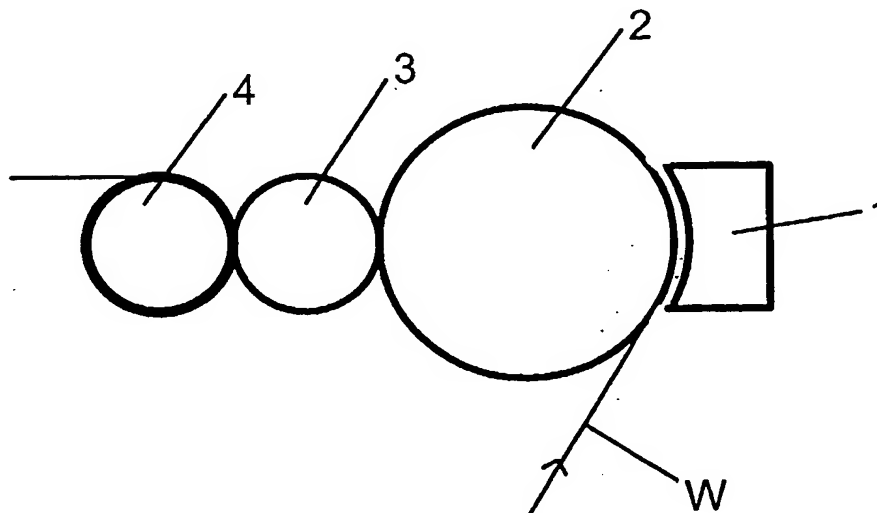

(57) Abstract: The present invention relates to a grounding electrode of a process in which a web (W) having a first side and a second side is arranged to serve as a substrate. A powdery layer is arranged to be formed on the first side of the web by applying electrically charged particles on the web while the grounding electrode is arranged to be located at the second side of the web. The grounding electrode is a rotating device. The invention also relates to a method utilizing such a grounding electrode.

WO 03/077371 A2

WO 03/077371 A2



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## A grounding electrode and a method in which it is utilized

The present invention relates to a grounding electrode of a process in which a moving web having a first side and a second side is arranged to serve as a substrate, and a powdery layer is arranged to be formed on the first side of the web by applying electrically charged particles on the web while the grounding electrode is arranged to be located at the second side of the web. The present invention also relates to a method for forming a powdery layer from powdery particles on a surface of a continuous web comprising steps of: Allowing the web having a first side and a second side to move between at least one charging unit of the powdery particles at the first side of the web, and at least one grounding electrode at the second side of the web being in a ground potential or another predetermined potential, applying on the first side of the web powdery particles, which are electrically charged in the charging unit, and finishing the powdery layer.

The known grounding electrodes used in this context have been stationary electrodes, such as electrically conductive plates.

20

A problem related to the method using the stationary grounding electrode with a moving web is that the particles of the dry powder tend to accumulate due to the stationary grounding electrode. The charged particles may tend to cake on the web at the location of the leaving edge of the grounding plate. A part of the charged particles remain in the sphere of influence of the grounding electrode, and do not move forward with the substrate. The phenomenon can be seen as a bubbling of the charged particles at the location of the edge of the stationary grounding electrode. As a consequence, an uneven powdery layer is formed on the substrate, and it can be seen as streaks on the surface of the substrate.

30

The device of the invention overcomes the defects of the prior art. The grounding electrode of the invention and the method of the invention are characterized in that the grounding electrode is a rotating device.

35

By using the rotating device the above-mentioned problems can be avoided, and a powdery layer without unevenness can be achieved. The rotating device can be for example a grounding roll, an endless conductive wire, or belt. A prerequisite for all the devices is that they  
5 must be electrically conductive at least partly.

The grounding electrode of the invention is used in a process in which electrically charged powdery particles are applied on a substrate by utilizing electric forces. The substrate is preferably a continuous web.  
10 The continuous web may be a web to be coated, or a surface onto which a film is formed and peeled off as a ready product. There is a wide variety for the material of the web; it may comprise papermaking fibers, for example chemical pulp and/or mechanical pulp, or it may be plastic, metallic, or a metal-coated plastic material.

15 The powdery particles may comprise inorganic particles, binder particles, plastic particles, or other polymeric particles. In a final product, the powdery particles may form a coating layer, or a film layer. Typically, the coating layer is aimed to replace conventional paper coatings, and the film layer is aimed to replace conventional film layers,  
20 such as a plastic film on a paper substrate. When the powdery particles are applied on the web they are substantially dry; the moisture content of the powdery particles is preferably less than 15 wt-%.

25 The process arrangement is as follows: The web having a first side and a second side serves as a substrate on which the powdery layer is formed. At the second side of the web there is the rotating grounding electrode, which attracts the electrically charged powdery particles intended to be applied on the first side of the web. The grounding  
30 electrode is in a ground potential or another predetermined potential, which deviates from the zero potential. For example, if the powdery particles are treated by a negative corona the grounding electrode may have a positive potential. The rotating grounding electrode may be in contact or in close range with the second surface of the web. The  
35 grounding roll may also have an insulating surface layer to enhance the electric field.

The powdery particles are charged in a charging unit. The charging unit may comprise at least one corona charging electrode at the first side of the web, or the particles are charged by tribocharging. A combination of the corona charging and the tribocharging may be also used. The  
5 electrically charged powdery particles are applied on the web by blowing the particles from a feeding nozzle towards the web.

When there are electrode/s at the both sides of the web, and the electrodes at the first side of the web are in a different potential  
10 compared to electrodes at the second side of the web, the powdery particles are applied on the substrate in such a manner that the electrodes at the opposite sides of the substrate form an electric field in which the particles of the dry powder are blown through a feeding nozzle. The layer formed of the powdery particles is finished by a  
15 suitable manner in a final fixing device, for example by thermomechanical treatment, such as calendering. The substrate can be treated only one surface at a time, or both surfaces at the same time. It is also possible that two or more layers are formed one upon the other.

20

The web to be treated may advance in a continuous manner on the surface of the grounding roll during the process. The grounding roll may form a nip with a first hot roll belonging to the finishing unit, which at least partially melts a binder of the powdery material. The finishing  
25 can be finalised in the next nip/nips. The grounding roll and the following rolls can form a calender stack. The web in contact with the grounding roll is grounded or brought in a predetermined potential down to the nip formed by the grounding roll and the first hot roll. The finishing can also be finalised by using chemicals, or a suitable  
30 radiation, for example UV radiation, to fix the coating powder to the web.

In the following, the method of the invention is explained by a drawing, which shows a schematic side view of a process step in which the  
35 grounding electrode of the invention is applied.

A web W to be treated, such as a paper or plastic web, runs between a rotating grounding roll 2 and a charging electrode 1. The web W is in contact with the grounding roll 2. The charging electrode 1 can be either positive or negative. The charging electrode 1 may be a corona charging electrode. Particles of a powdery material are charged by the electrode 1, and blown towards the web W by a feeding nozzle (not shown). The particles may include inorganic particles, binder particles, plastic particles, or other polymeric particles. The particles of the powdery material are attracted by the grounding roll 2, and thus a powdery layer is formed on the surface of the web W.

The powdery layer, which is adhered to the web W by electrostatic forces is fixed to the web in nips formed between the grounding roll 2 and a heated hard roll 3, and the heated hard roll 3 and a resilient roll 4. The web W is directly grounded down to the first nip but it is possible that the first heated hard roll 3 is in the same potential as the grounding roll 2. The powdery particles include binder particles, which melt in contact with the heated hard roll 3.

20

The invention is not restricted to the description above, but it may vary within the scope of the claims.

Claims:

1. A grounding electrode of a process in which a web (W) having a first side and a second side is arranged to serve as a substrate, and a powdery layer is arranged to be formed on the first side of the web by applying electrically charged particles on the web while the grounding electrode is arranged to be located at the second side of the web, **characterized** in that the grounding electrode is a rotating device.
2. The grounding electrode according to claim 1, **characterized** in that it is a roll (2), an endless conductive wire, or belt.
3. A method for forming a powdery layer from powdery particles on a surface of a continuous web (W) comprising steps of:
- allowing the web having a first side and a second side to move between at least one charging unit of the powdery particles at the first side of the web, and at least one grounding electrode at the second side of the web being in a ground potential or another predetermined potential,
  - applying on the first side of the web powdery particles, which are electrically charged in the charging unit, and
  - finishing the powdery layer,
- characterized** in that the grounding electrode is a rotating device.
4. The method according to claim 3, **characterized** in that the charging unit comprises a corona charging electrode (1).
5. The method according to claim 3, **characterized** in that the charging unit comprises means for charging powdery particles by tribocharging.
6. The method according to claim 3, **characterized** in that the rotating device is a roll (2), an endless conductive wire, or belt.
7. The method according to claim 6, **characterized** in that the web is finished in a calender stack comprising a rotating grounding roll (2), a heated hard roll (3), and a resilient roll (4).

1/1

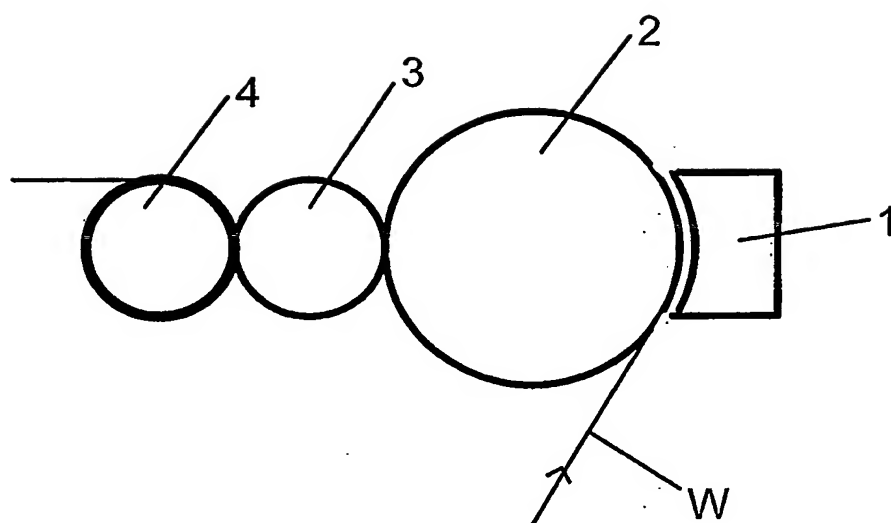


Fig.



(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number  
**WO 03/077371 A3**

(51) International Patent Classification<sup>7</sup>: **D21H 23/50**,  
B05D 1/06

(74) Agent: **TAMPEREEN PATENTTITOIMISTO OY**;  
Hermiankatu 12 B, FIN-33720 Tampere (FI).

(21) International Application Number: **PCT/FI03/00183**

(22) International Filing Date: **11 March 2003 (11.03.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
20020479 14 March 2002 (14.03.2002) FI  
20021651 16 September 2002 (16.09.2002) FI

(71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PUTKISTO, Kaisa** [FI/FI]; Poukamankatu 7 C 8, FIN-33720 Tampere (FI). **MAIJALA, Juha** [FI/FI]; Messukylänkatu 37 B 12, FIN-33700 Tampere (FI). **KÄSMÄ, Veli** [FI/FI]; Lintuvidankatu 33 G 26, FIN-33340 Tampere (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: **A GROUNDING ELECTRODE AND A METHOD IN WHICH IT IS UTILIZED**

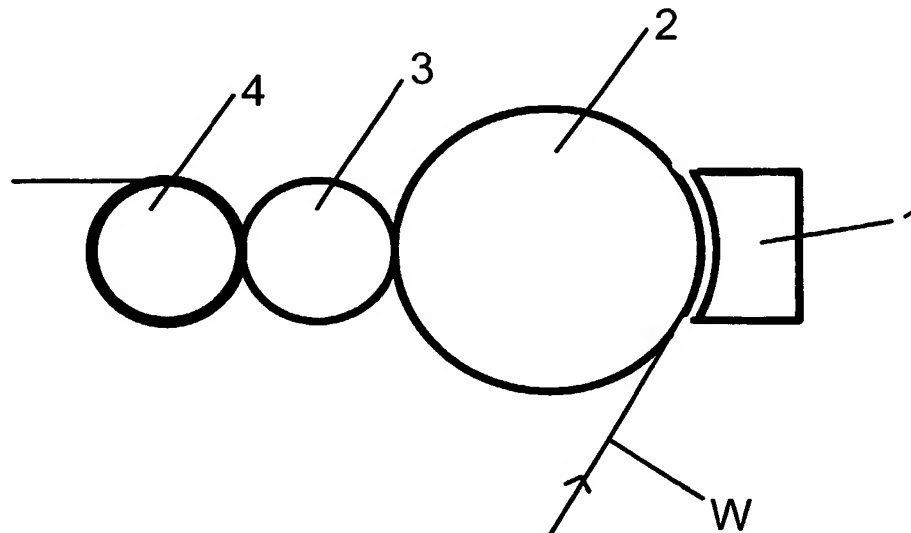

(57) Abstract: The present invention relates to a grounding electrode of a process in which a web (W) having a first side and a second side is arranged to serve as a substrate. A powdery layer is arranged to be formed on the first side of the web by applying electrically charged particles on the web while the grounding electrode is arranged to be located at the second side of the web. The grounding electrode is a rotating device (2). The invention also relates to a method utilizing such a grounding electrode.

WO 03/077371 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**  
4 December 2003

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/FI 03/00183

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 D21H23/50 B05D1/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D21H B05D B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 03092 A (NYBERG TIMO ;RAJALA PASI (FI); VALMET CORP (FI); GROENROOS LARS (F) 20 January 2000 (2000-01-20) the whole document ----	1-4,6
X	GB 1 017 576 A (COMMERCIAL PLASTICS LTD) 19 January 1966 (1966-01-19) the whole document ----	1-3,6
X	FR 1 312 830 A (COMMERCIAL PLASTICS LTD) 21 December 1962 (1962-12-21) the whole document ----	1-3,6
X	US 3 248 253 A (GUY NICOLAS ET AL) 26 April 1966 (1966-04-26) column 3, line 73 -column 5, line 41; claims 1-11; figures 2,3 ----- -/--	1-3,6

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 September 2003

Date of mailing of the international search report

06/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Nestby, K

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/FI 03/00183

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 198 36 022 A (WEITMANN & KONRAD FA) 17 February 2000 (2000-02-17) the whole document -----	1-3,6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FI 03/00183

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0003092	A	20-01-2000	FI 981574 A	09-01-2000
			AU 5041499 A	01-02-2000
			CA 2336874 A1	20-01-2000
			EP 1099023 A1	16-05-2001
			WO 0003092 A1	20-01-2000
			JP 2002520503 T	09-07-2002
GB 1017576	A	19-01-1966	FR 1370821 A	28-08-1964
FR 1312830	A	21-12-1962	NONE	
US 3248253	A	26-04-1966	FR 1338913 A	04-10-1963
			FR 1338453 A	27-09-1963
			FR 83092 E	05-06-1964
			GB 1046613 A	26-10-1966
			BE 633379 A	
			CH 397481 A	15-08-1965
			DE 1302426 B	
			DK 114324 B	16-06-1969
			FI 42179 B	02-02-1970
			FR 83092 A	
			FR 1360556 A	08-05-1964
			GB 1043443 A	21-09-1966
			GB 1012364 A	08-12-1965
			NL 140784 B	15-01-1974
			NL 293990 A	
			SE 319708 B	19-01-1970
DE 19836022	A	17-02-2000	DE 19836022 A1	17-02-2000
			DE 59903568 D1	09-01-2003
			WO 0009337 A1	24-02-2000
			EP 1105295 A1	13-06-2001
			JP 2002522277 T	23-07-2002